#### **CHAPTER III**

#### **MATERIALS AND METHODS**

## 3.1 Sample collection

Twenty five lower primary incisor teeth were used for this study. The teeth were extracted from 5-9 years old healthy children due to prolonged retention (as shown in Figure 15). The teeth were stored in normal saline solution with 0.2% sodium azide and kept in refrigerator at 4 °C. All tooth specimens were experimented within 24 hours after extraction.



Figure 15 Prolonged retention of lower anterior primary teeth (arrow)


## 3.2 Tooth preparation

3.2.1 The root of the tooth was removed at the level of approximately 1mm apically to the cementoenamel junction using a high speed cylinder diamond bur (Figure 16).



**Figure 16** A root of the tooth was removed at the level of approximately 1mm apically to the cementoenamel junction.

- 3.2.2 The remaining pulpal tissue in the coronal portion was removed with barbed broach under water for preventing air bubble.
- 3.2.3 The tooth was attached to Perspex collar (i.d. 4 mm, o.d. 8 mm, height 6 mm) using self cure acrylic resin (Figure 17).
- 3.2.4 The pulp cavity was then filled with NSS and the collar was connected to manometer.

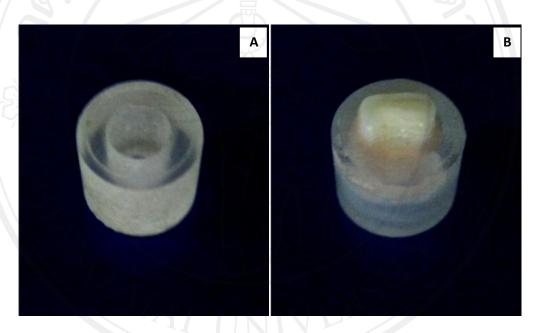

**Figure 17** The tooth was attached to Perspex collar (A) using self cure acrylic resin and cut the incisal edge until exposed dentin (B).

- 3.2.4 The high speed cylinder diamond bur was used for cutting the incisal edge until exposed dentin under water coolant. Then, further 1 mm dentin was removed using the same bur.
- 3.2.5 Intrapulpal pressure was set to 0, 15, 30 and 45 cmH<sub>2</sub>0 consecutively. Care was taken to avoid tapping air bubble in the system (Figure 18).

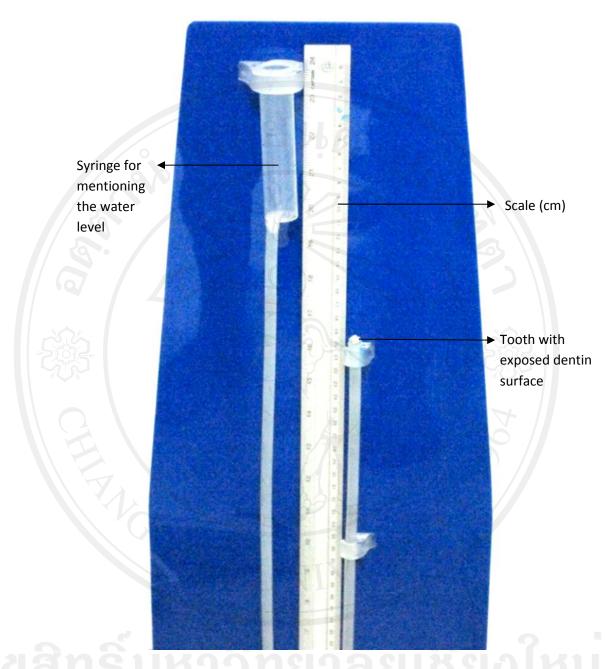


Figure 18 Connecting the collar to water manometer

## 3.3 Preparation of dentin surface

3.3.1 The exposed dentin surface was equally divided into 2 parts. One half was apply with 35% phosphoric acid gel (3M ESPE Scotchbond<sup>TM</sup>, 3M ESPE,

U.S.A.) for 15 seconds, then rinse with distilled water and mop dry with cotton pallet, while the other half is left unetched.

- 3.3.2 The hydrostatic pressure was applied to the pulp cavity by setting manometer at 0, 15, 30 and 45 cmH<sub>2</sub>O in turn. For example, for setting hydrostatic pressure at +45 cmH<sub>2</sub>O, the water level at the open end was set to be higher than the tooth surface for 45 cm.
- 3.3.3 A hydrophobic silicone impression material (Xantopren<sup>®</sup> VL plus: Heraeus, Kulzer, Germany) was used for taken the impression of dentin surface after mop dry and left for 30 seconds after setting the pressure (Figure 19, 20).



**Figure 19** Perspex cap for loading a hydrophobic, silicone rubber material in recording the surface of cut dentin.

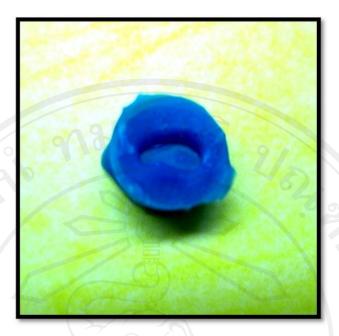


Figure 20 Impression from recording cut dentin surface.

- 3.3.4 The impression material was loaded into the Perspex cap just enough to fill up the cap to prevent the excess material which may compress the droplet on dentin surface.
- 3.3.5 Gently press the cap with impression onto the collar for recorded surface of the dentin and left in place until the impression material was fully set.
- 3.3.6 The replica was made by casting the impression with low viscosity epoxy resin within an hour and left overnight.
- 3.3.7 The replica was examined in a Scanning Electron Microscope (JEOL® JSM-5410LV; JEOL, Tokyo, Japan).

#### 3.4 Preparation of dry dentin surface

3.4.1 At the end of experiment, the dentin surface of each tooth specimen was examined in a Scanning Electron Microscope (JEOL® JSM-5410LV; JEOL, Tokyo, Japan).

# 3.5 Preparation tooth for measuring distance from cut dentin surface to dental pulp

- 3.5.1 The tooth was separated longitudinally (labial to lingual) into 2 sections using dental chisel and hummer.
- 3.5.2 The dentin surface of the separated tooth was examined in a Scanning Electron Microscope (JEOL® JSM-5410LV; JEOL, Tokyo, Japan).

### 3.6 Processing for Scanning Electron Microscope

- 3.6.1 The samples were fixed to stubs with the conductive adhesive tape and coated with gold-palladium under vacuum (JEOL® JFC1200 Fine Coater; JEOL, Tokyo, Japan) (Figure 21, 22).
- 3.6.2 All specimens were examined in a Scanning Electron Microscope (JEOL® JSM-5410LV; JEOL, Tokyo, Japan) (Figure 23) at the Institute of product quality and standardization Maejo University.
- 3.6.3 Digital photomicrographs were taken at a magnification of x 50, 3500 for later analysis.
- 3.6.4 The size of the droplets and dentinal tubules and the distance from cut dentin surface to dental pulp were measured by Scion Image Program (Release-Alpha 4.0.3.2).



Figure 21 Samples were coated with gold palladium prior SEM examination.

- (A) a replica of the tooth in epoxy resin
- (B) a dry tooth
- (C) a separated tooth



Figure 22 The picture shows a gold palladium coater machine.



**Figure 23** The picture shows a Scanning Electron Microscope (JEOL® JSM-5410LV; JEOL, Tokyo, Japan)

#### 3.7 Statistical Analysis

- 3.7.1 On unetched dentin surface, The size of fluid droplets was comparing both areas of sampling (central and peripheral) and vary applying pressures using paired t-test and repeated measurement Kruskal-Wallis One Way ANOVA on Ranks with Dunn's multiple comparison consecutively.
- 3.7.2 On etched dentin surface, the size of dentinal tubules was compared using repeated measurement Kruskal-Wallis One Way ANOVA on Ranks with Dunn's multiple comparison. No comparison between central and peripheral was tested.
- 3.7.3 The size of dentinal tubules at central and peripheral of etched dentin surface of the dry teeth was compared using paired t-test.

## ลิขสิทธิ์มหาวิทยาลัยเชียงใหม่ Copyright<sup>©</sup> by Chiang Mai University All rights reserved